

Aeromodelling



CUSTOMISED DRONES, AIR SHOWS & TRAININGS

spdrone.xyz

[▶](#) [f](#) [t](#) [in](#) [@](#) /spdrone_xyz



First Powered Flight




First powered flight on 17 December 1903, for 120 feet (36.5 m) in 12 seconds, at a speed of only 6.8 mph over the ground.

Outline

- 1 Overview of Aeromodelling
- 2 Materials and Tools
- 3 Power Sources
- 4 Construction Techniques
- 5 Radio Control of Model

Types of Flying





Models



- 1 Free Flight Models.
 - Chuck/catapult Gliders.
 - Rubber Powered.
 - Tow-line Gliders.
- 2 Control Line Models.
 - Trainer.
 - Stunt and Combat.

Types of Flying

Models



1 Free Flight

- Models.
- Chuck/catapult
- Gliders.

2

- Rubber Powered.
- Tow-line
- Gliders.

3

- Control Line Models.

- Trainer.
- Stunt and Combat.

Types of Flying

Models



- 1 Free Flight Models.
 - Chuck/catapult Gliders.
 - Rubber Powered.
 - Tow-line Gliders.
- 2 Control Line Models.
 - Trainer.
 - Stunt and Combat.
- 3 Radio Control Models.
 - Free Flight (2 Channel Control).
 - Three channel and four channel

Power sources used in Aeromodelling

Generally two types of continuous power sources are used in aeromodelling

- Electricity from rechargeable batteries and IC engines.
- Except the above power sources **rubber band** powered and **compressed air** powered models are also very popular.



Outline

- 1 Overview of Aeromodelling
- 2 Materials and Tools**
- 3 Power Sources
- 4 Construction Techniques
- 5 Radio Control of Model

Materials

Various types of materials are used to build a model. Selection of material depend on the size shape and type of model. Some of the commonly used materials are listed below.

- 1 Balsa wood strips, bamboo sticks etc.
- 2 Thermoplastics.
- 3 Polystyrene; commonly known as Thermocol.
- 4 Composite (glass or carbon fibre reinforced).
- 5 Japanese tissue, bamboo paper and silk as covering.
- 6 Adhesives like Feviquick, Balsa



Materials

Various types of materials are used to build a model. Selection of material depend on the size shape and type of model. Some of the commonly used materials are listed below.

- 1 Balsa wood strips, bamboo sticks etc.
- 2 Thermoplastics.
- 3 Polystyrene; commonly known as Thermocol.
- 4 Composite (glass or carbon fibre reinforced).
- 5 Japanese tissue, bamboo paper and silk as covering.
- 6 Adhesives like Feviquick, Balsa



Materials

Various types of materials are used to build a model. Selection of material depend on the size shape and type of model. Some of the commonly used materials are listed below.

- 1 Balsa wood strips, bamboo sticks etc.
- 2 Thermoplastics.
- 3 Polystyrene; commonly known as Thermocol.
- 4 Composite (glass or carbon fibre reinforced).
- 5 Japanese tissue, bamboo paper and silk as covering.
- 6 Adhesives like Feviquick, Balsa



Materials

Various types of materials are used to build a model. Selection of material depend on the size shape and type of model. Some of the commonly used materials are listed below.


- 1 Balsa wood strips, bamboo sticks etc.
- 2 Thermoplastics.
- 3 Polystyrene; commonly known as Thermocol.
- 4 Composite (glass or carbon fibre reinforced).
- 5 Japanese tissue, bamboo paper and silk as covering.
- 6 Adhesives like Feviquick, Balsa



Materials

Various types of materials are used to build a model. Selection of material depend on the size shape and type of model. Some of the commonly used materials are listed below.

- 1 Balsa wood strips, bamboo sticks etc.
- 2 Thermoplastics.
- 3 Polystyrene; commonly known as Thermocol.
- 4 Composite (glass or carbon fibre reinforced).
- 5 Japanese tissue, bamboo paper and silk as covering.
- 6 Adhesives like Feviquick, Balsa



Materials


Various types of materials are used to build a model. Selection of material depend on the size shape and type of model. Some of the commonly used materials are listed below.

- 1 Balsa wood strips, bamboo sticks etc.
- 2 Thermoplastics.
- 3 Polystyrene; commonly known as Thermocol.
- 4 Composite (glass or carbon fibre reinforced).
- 5 Japanese tissue, bamboo paper and silk as covering.
- 6 Adhesives like Feviquick, Balsa



Tools

Some of the tools used to build a model is shown in the figure below.

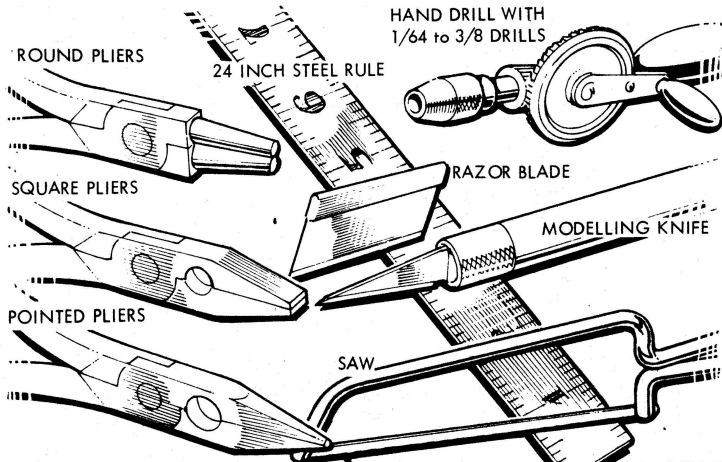

Outline

- 1 Overview of Aeromodelling
- 2 Materials and Tools
- 3 Power Sources**
- 4 Construction Techniques
- 5 Radio Control of Model

Rechargeable Batteries



Rechargeable batteries and Electronic Speed Controller (ESC) are used to drive motors of a model aircraft. Two different types of batteries are used in aeromodelling.

- 1 **Ni-MH batteries**, cell voltage is 1.2 V, in series connection of 8 to 9 cells are generally used.
- 2 **Lithium-Polymer batteries**, cell voltage is 3.7 V.

In recent years Li Po batteries are more popular in aeromodelling because of less weight and faster discharge rate.

IC engines

Two different types of IC engines are used in aeromodelling.



- 1 Diesel engines (compression ignition) and



- 2 Glow Plug engines or Petrol engines.

Diesel Engines



- It is a **two-stroke** diesel engine. An **adjustable compression ratio** helps the ignition.

- **Fuel:** A mixture of **ether, kerosene and lubricant** (castor oil or synthetic oil.)

Available from as small as 0.01 in^3

Diesel Engines



- It is a **two-stroke** diesel engine. An **adjustable compression ratio** helps the ignition.
- **Fuel:** A mixture of **ether, kerosene and lubricant** (castor oil or synthetic oil.)


Available from as small as 0.01 in³

Diesel Engines




- It is a **two-stroke** diesel engine. An **adjustable compression ratio** helps the ignition.
- **Fuel:** A mixture of **ether, kerosene and lubricant** (castor oil or synthetic oil.)
- Available from as small as 0.01 in^3 to over 1.0 in^3

Glow Plug Engines

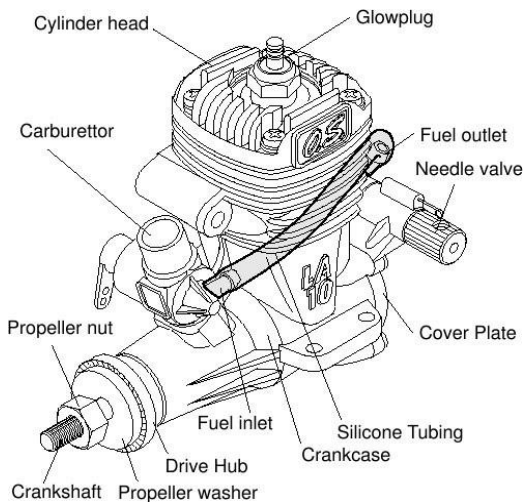

- It is a **Two-Stroke** petrol engine. A **glow-plug** helps the ignition.
- **Fuel:** A mixture of slow burning **methanol**, **nitromethane** and **lubricant** (castor oil or synthetic oil.)
- Available from as small as 0.01 in^3


Glow Plug Engines

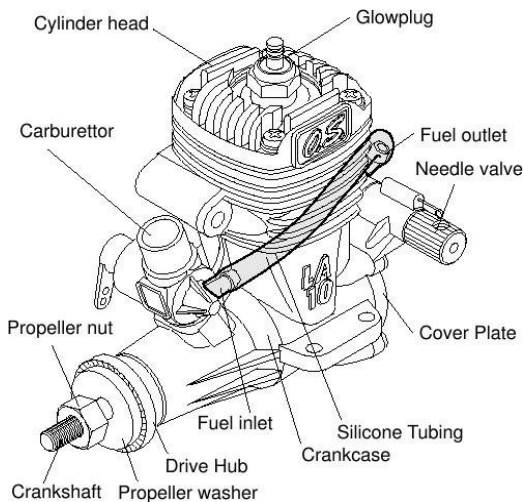

- It is a **Two-Stroke** petrol engine. A **glow-plug** helps the ignition.
- **Fuel:** A mixture of slow burning **methanol**, **nitromethane** and **lubricant** (castor oil or synthetic oil.)

Available from as small as 0.01 in^3


Glow Plug Engines

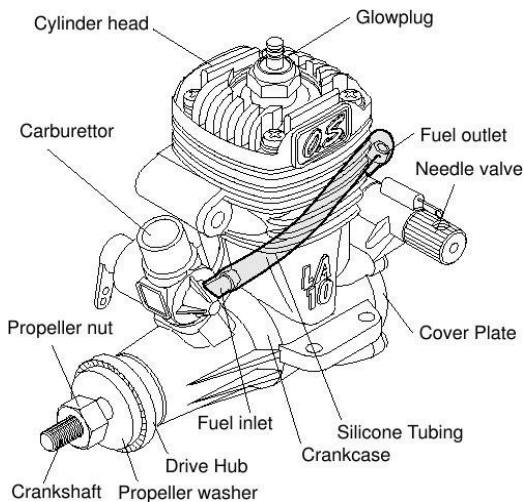

- It is a **Two-Stroke** petrol engine. A **glow-plug** helps the ignition.
- **Fuel:** A mixture of slow burning **methanol, nitromethane and lubricant** (castor oil or synthetic oil.)
- Available from as small as 0.01 in^3 to over 1.0 in^3

Starting a Glow Engine

Opening of Needle Valve




- Open the needle-valve 3 turns (for 15LA-S), 1 - 2 turns (for 25,40,46LA-S) in the direction of arrow from the closed position.

Starting a Glow Engine

Priming

Place your finger over the venturi to choke intake.


Turn the propeller two revolutions while watching the fuel line.

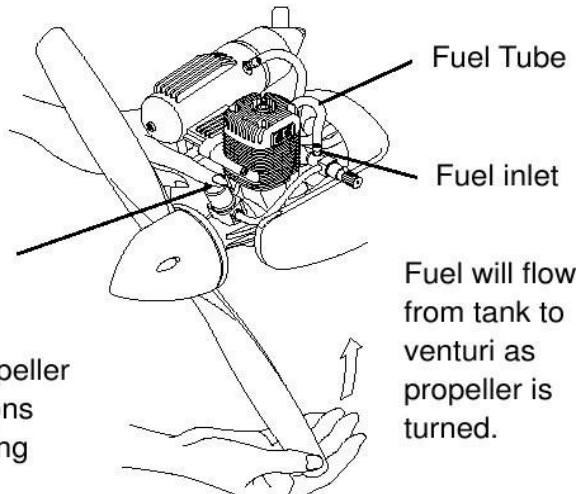

Starting a Glow Engine


Priming

Turn the engine for 3 to 4 seconds by an electric starter without connecting glowplug battery.

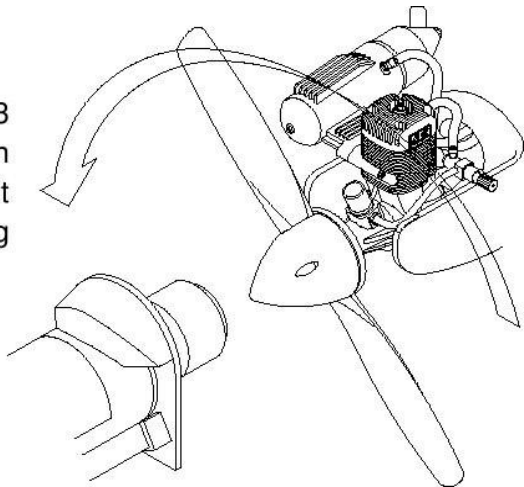


Starting a Glow Engine

Throttle Position

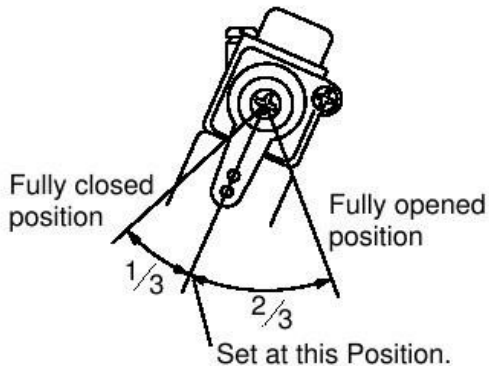

Starting a Glow Engine

1 Heat glow-plug

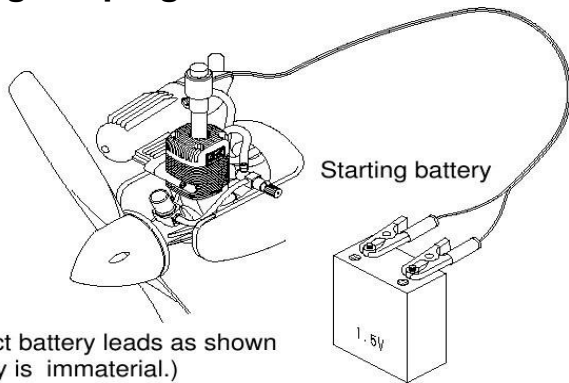


Connect battery leads as shown
(polarity is immaterial.)

- 2 Apply electric starter to start engine.
- 3 Open the throttle fully.

Starting a Glow Engine

1 Heat glow-plug

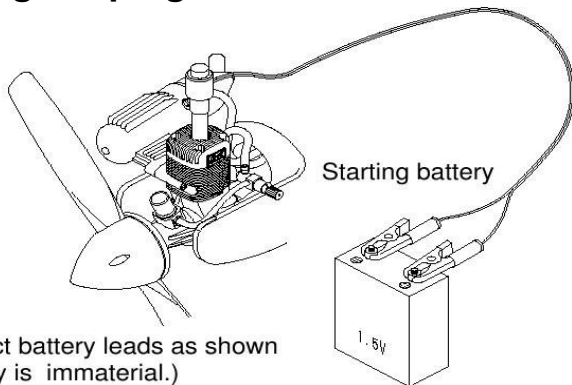


Connect battery leads as shown
(polarity is immaterial.)

- 2 Apply electric starter to start engine.
- 3 Open the throttle fully.

Starting a Glow Engine


1 Heat glow-plug

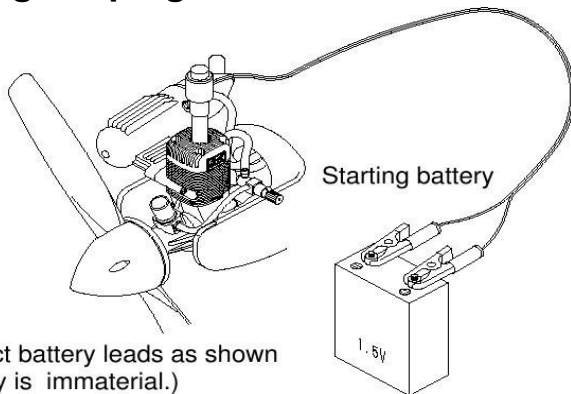

- 2 Apply electric starter to start engine.
- 3 Open the throttle fully.


Starting a Glow Engine

Hold model securely when starting

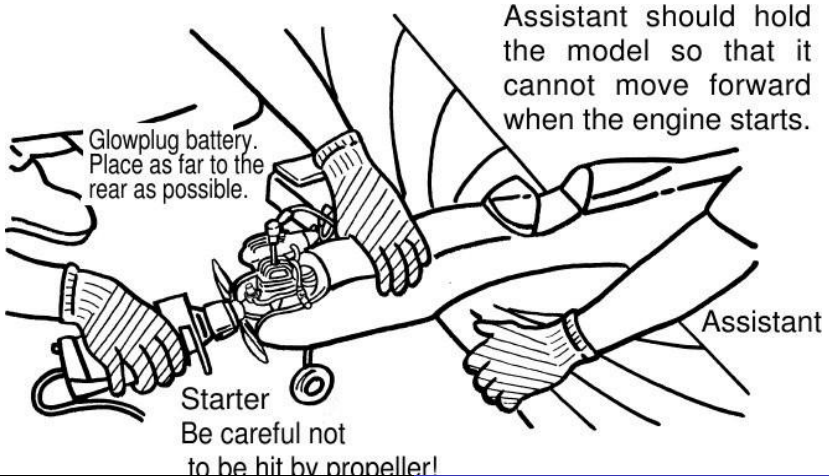

Starting a Glow Engine

Needle-valve adjustment




Listen to the sound carefully.

- Gradually close the needle-valve until the exhaust sound changes from an irregular pitch (four-cycle) to a steady pitch (two-cycle).
- Close the needle-valve gradually until the engine sound is changing from a four-cycle into a two-cycle in pitch.

Starting a Glow Engine

Needle-valve adjustment




Listen to the sound carefully.

- Gradually close the needle-valve until the exhaust sound changes from an irregular pitch (four-cycle) to a steady pitch (two-cycle).
- Close the needle-valve gradually until the engine sound is changing from a four-cycle into a two-cycle in pitch.

Starting a Glow Engine


Disconnect booster

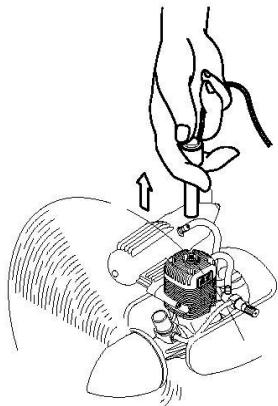

- Disconnect the battery leads from the engine with care so that the plug clip does not touch the rotating propeller.
- If the engine stops when battery leads are disconnected, close the needle-valve a little (approx. 45) further, and restart the engine.

Starting a Glow Engine


Disconnect booster

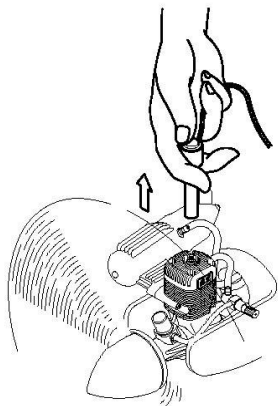

- Disconnect the battery leads from the engine with care so that the plug clip does not touch the rotating propeller.
- If the engine stops when battery leads are disconnected, close the needle-valve a little (approx. 45) further, and restart the engine.

Starting a Glow Engine


Needle-valve adjustment(Summary)

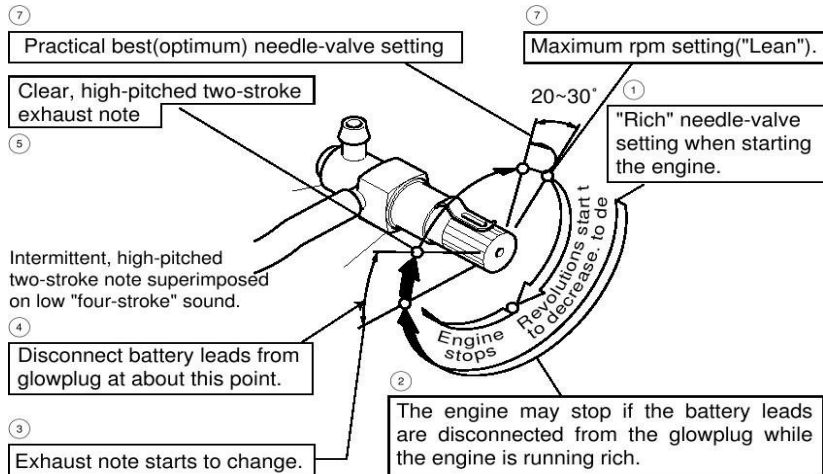


Outline

- 1 Overview of Aeromodelling
- 2 Materials and Tools
- 3 Power Sources
- 4 Construction Techniques**
- 5 Radio Control of Model


Side-frame type Fuselage

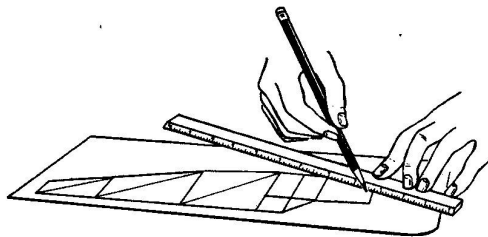

- Take a proper plan and fix it on a board. Use pins to fix the balsa strips in proper place. Now glue it to get the shape.

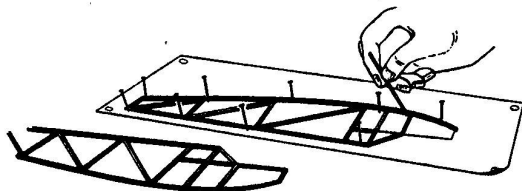


Side-frame type Fuselage

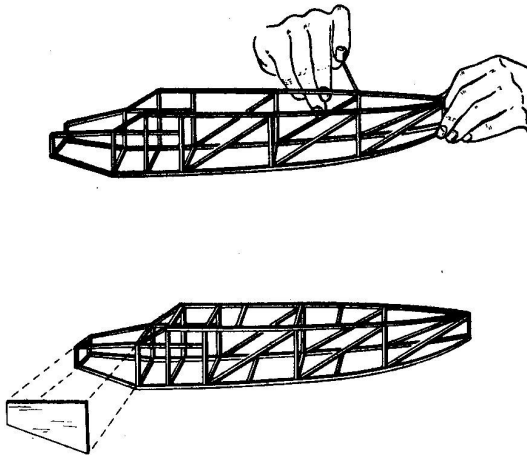


- Once one side is prepared build the other side top of it. Separate it with razor blade and give it a proper box type shape.


Side-frame type Fuselage

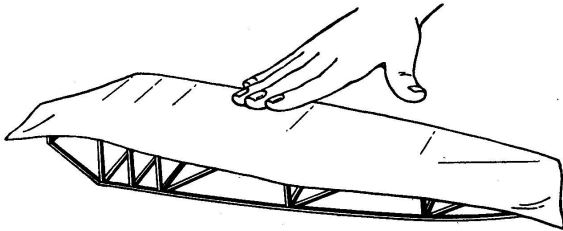

- Now cover it with Japanese tissue.




Bulkhead-stringer Fuselage

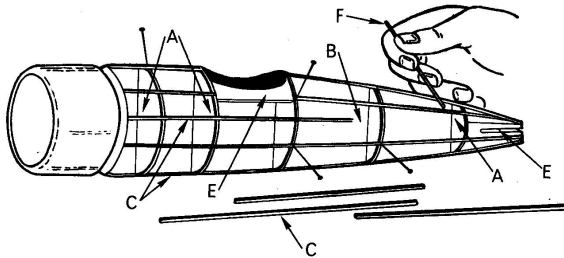


- Glue the bulkheads (A) to the vertical keel (B). Now glue the stringers to the proper position.

Bulkhead-stringer Fuselage

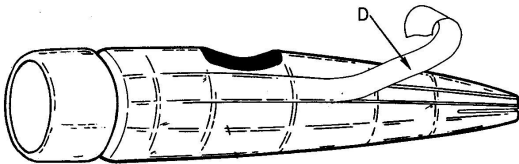


- Cover the structure with silk tape or Japanese tissue.


R/C Model

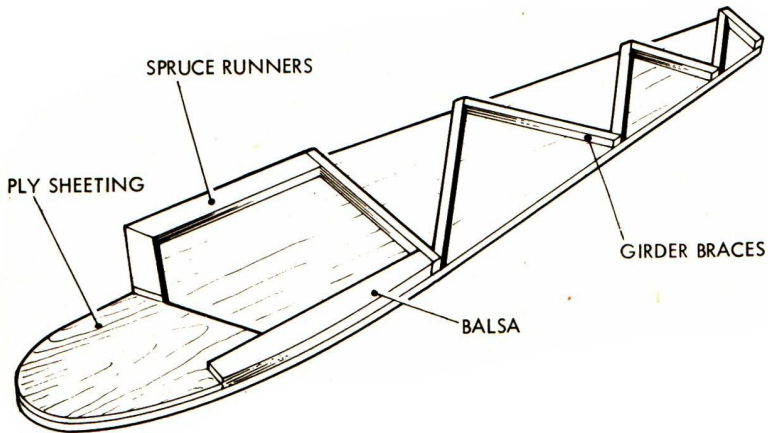


Shaping of Wing Ribs

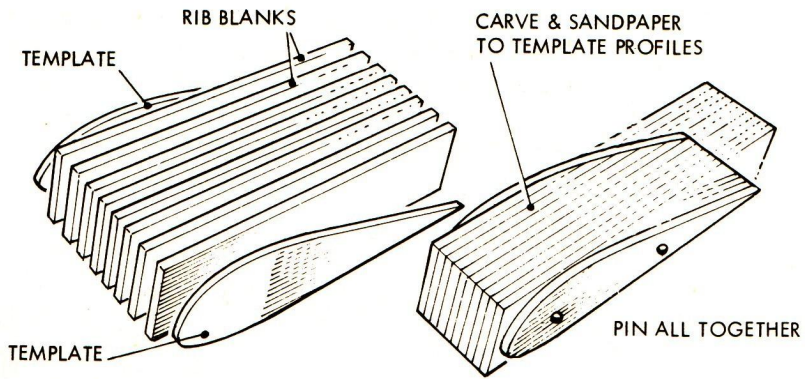

Wing Details

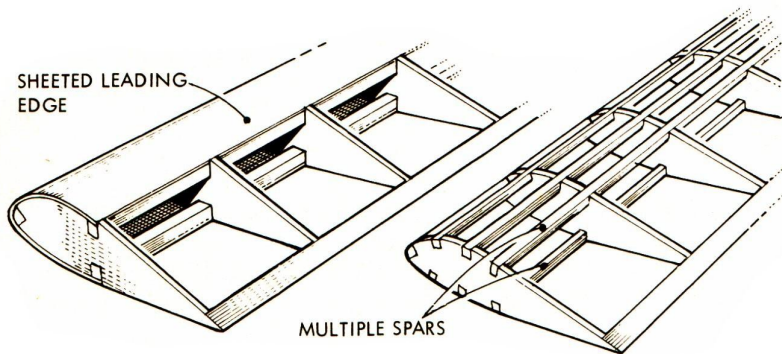


Anti-Warp Type Wing

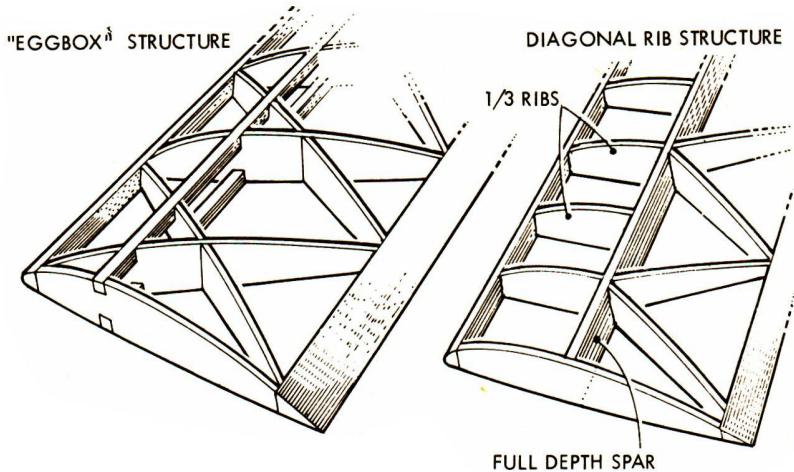


Anti-Warp Type Tail

ANTI-WARP INSERTS
FOR SOLID SHEET TAILPLANE

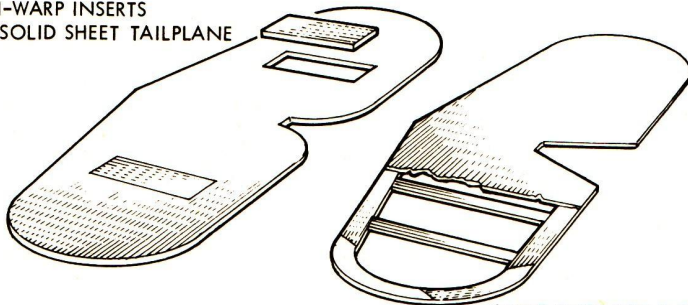


SHEET OVER TOP SURFACE
IF A FLAT STRUCTURE TAIL

Covering of Wing by Tissue

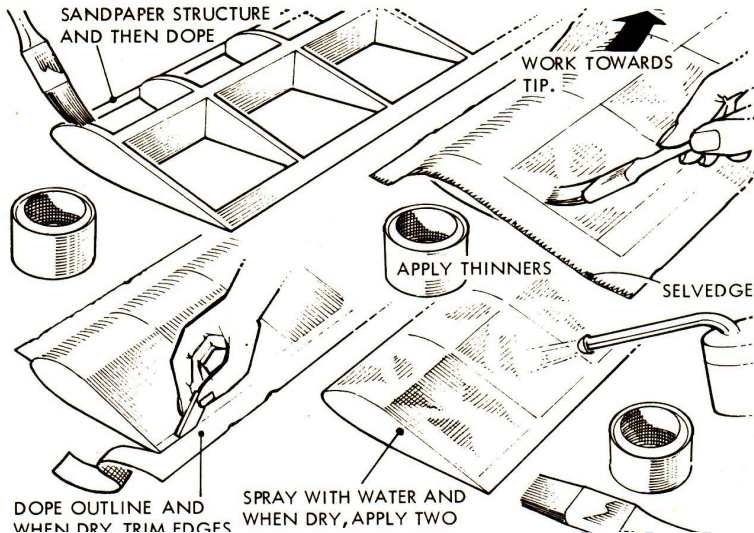

Covering of Wing by Plastic Sheet

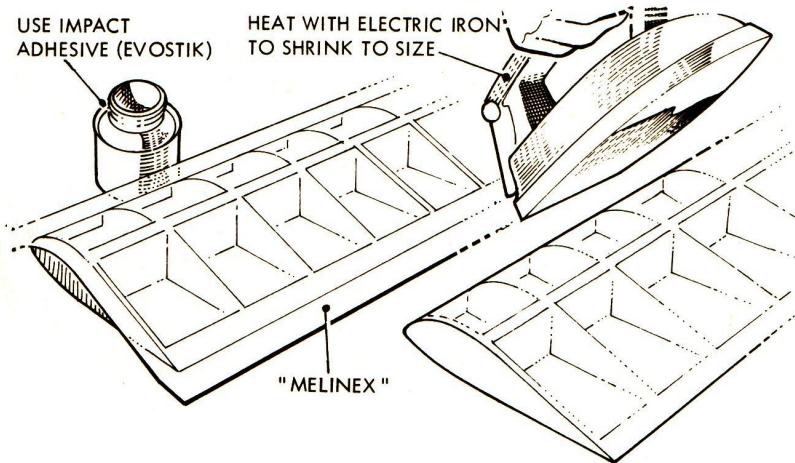


Use of Plastics and Thermocole


ACETATE MOULDING
FOR COCKPIT COVER




GLASS FIBRE IN
FEMALE MOULD

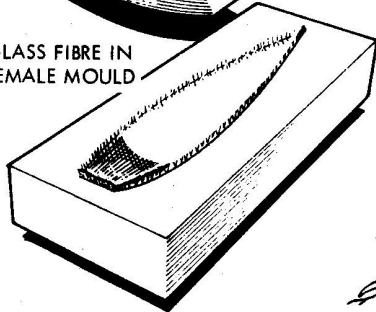

"ROYALITE" MOULDINGS

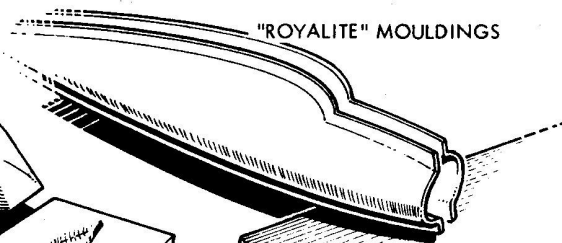


EXPANDED POLYSTYRENE
CUT WITH A HOT WIRE

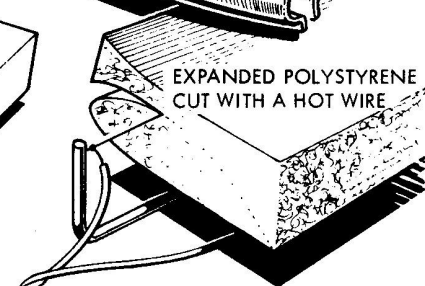

TO BATTERY (12 to 24 volt)

Assembling of Model

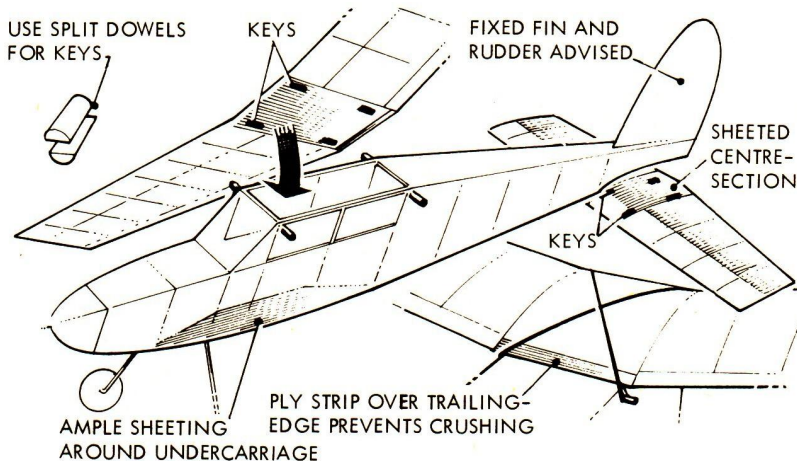

Outline


- 1 Overview of Aeromodelling
- 2 Materials and Tools
- 3 Power Sources
- 4 Construction Techniques
- 5 Radio Control of Model

Radio Control


A Radio Control consists of following three parts:

- 1 Transmitter,
- 2 Receiver and
- 3 Servos.

6 Channel Transmitter

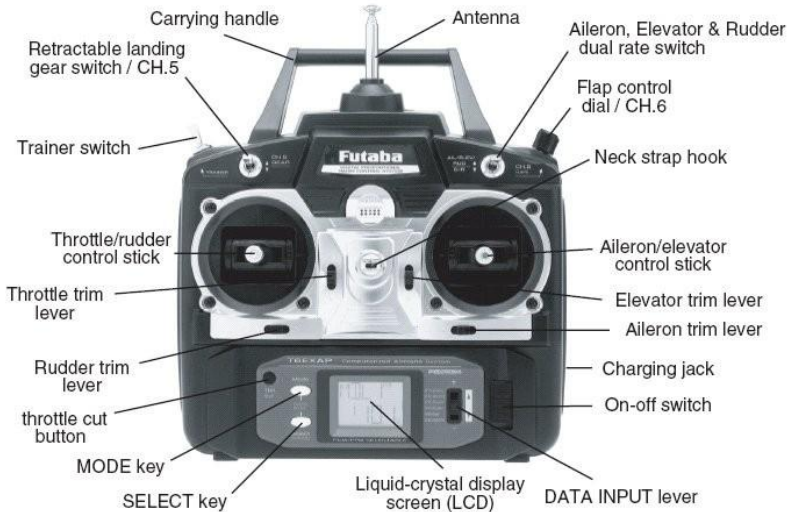


Receiver and Servos

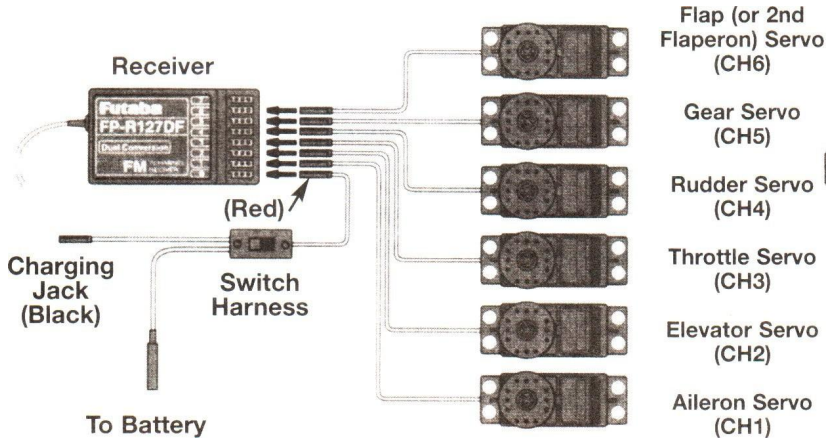


Servo connection

3

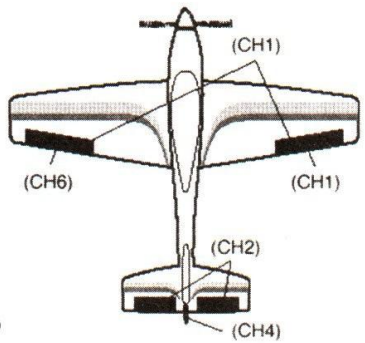

Flaperon Mode (Dual Aileron Servos, CH1 & 6)

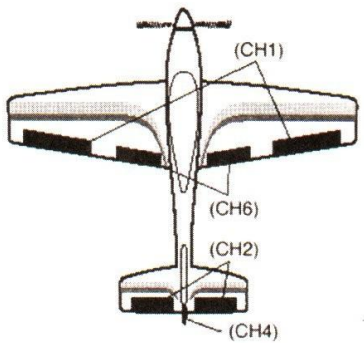

Independent Aileron & Flap

A Few Thumb Rules for Model Making

- 1 Wing aspect ratio (b^2/S) should be within **6 to 7.5**.
- 2 Fuselage length 2.5 to 4 times wing chord.
- 3 Horizontal tail area 18-22 % of wing area.
- 4 Horizontal tail aspect ratio 3 to 5.
- 5 Vertical tail area 8 to 12 % of wing area.
- 6 Vertical tail aspect ratio 1.5 to 3.
- 7 Initially, Wing incidence may be within 0^0 to 2^0 .
- 8 Provide dihedral of 0^0 to 2^0 .
- 9 Horizontal tail plane incidence angle may be 0^0 to -3^0 .
- 10 Make the thurst line about 0^0 to 2^0 downward.